

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>H04Q 7/22</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/07393</b> <b>(43) International Publication Date:</b> 10 February 2000 (10.02.00)
<b>(21) International Application Number:</b> PCT/US99/16687 <b>(22) International Filing Date:</b> 29 July 1999 (29.07.99) <b>(30) Priority Data:</b> 09/124,908      30 July 1998 (30.07.98)      US <b>(71) Applicant:</b> ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US). <b>(72) Inventors:</b> HOIRUP, Carsten; 509 Jordan Ridge Lane, Raleigh, NC 27603 (US). FRANK, Mara; 2413 Beechridge Road, Raleigh, NC 27608 (US). <b>(74) Agents:</b> GRUDZIECKI, Ronald, L. et al.; Burns, Doane, Swecker & Mathis, L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> FEATURES FOR EMERGENCY CALLING AND SHORT MESSAGING SYSTEM		
<b>(57) Abstract</b> <p>The present invention provides a method for communicating emergency messages using non-voice connections. According to exemplary embodiments of the present invention, an emergency short message service is added to digital wireless standards, such as GSM-based standards. This service allows users to place an emergency call with the specific purpose of sending an emergency data message using Short Message Service (SMS). Such data messages might include the caller's geographical position, electronic mail messages, or possibly, diagnostic information. As a result, the emergency data messaging of the present invention will be given the same access conditions as voice emergency calls in a cellular or satellite communications system.</p> <div data-bbox="649 1155 1477 1806"><pre>sequenceDiagram     participant Net     participant MS     Note over Net,MS: 310     Net-&gt;&gt;MS: CHANNEL REQUEST (Establishment Cause = Emergency SDDCCH Procedure)     Note over MS: 320     MS-&gt;&gt;Net: IMMEDIATE ASSIGNMENT     Note over Net,MS: 330     Net-&gt;&gt;MS: CM SERVICE REQUEST (CM Service Type = Emergency Short Message Service)</pre></div>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

## FEATURES FOR EMERGENCY CALLING AND SHORT MESSAGING SYSTEM

### BACKGROUND

The present invention relates generally to radiocommunication systems and  
5 methods for signaling in radiocommunication systems and, more particularly, to  
systems and methods for communicating emergency messages over non-voice  
communication channels in radiocommunication systems.

GSM describes a European standard for radiocommunication and the  
corresponding Public Land Mobile Network (PLMN) which is intended to provide  
10 uniformity so that users can access radiocommunication systems throughout  
Europe with minimal equipment compatibility problems. GSM includes many  
services for subscribers, including a message function service called the Short  
Message Service (SMS) which provides for the transmission of text messages  
having up to 160 alphanumeric characters to be sent to or from a subscriber at his  
15 or her mobile unit.

When an SMS message is delivered from a service center to a mobile unit,  
regardless of how it originates, such a message is conventionally referred to as a  
"mobile terminated short message" (MTSM). If an SMS message originates at a  
mobile unit, the signal to the service center requesting forwarding of the SMS  
20 message is conventionally referred to as a "mobile originated short message"  
(MOSM). It is the MOSM which is the focus of the present invention.

In a GSM-based cellular or satellite communication process, such as the  
Asia Cellular Satellite system (ACeS), a procedure referred to as "connection  
establishment" identifies the type of call (e.g., an emergency call) initiated by or  
25 terminated at a mobile station. One skilled in the art will appreciate that GSM-  
based systems include, but are not limited to, GSM-based systems operating in the  
900MHz, 1800MHz or 1900MHz range.

-2-

Connection establishment involves the initial handshaking and exchange of control information between a mobile station and a GSM-based network, which occurs before a connection is established. This procedure gives GSM-based networks the ability to determine the eligibility of a mobile phone user to place a particular call (e.g., whether to grant or deny to certain users connection of certain calls based upon the user's subscription type). In the case of emergency calls, the connection establishment procedure is used by networks to grant open access to all users, regardless of subscription restrictions or other conditions that would normally block access for other types of calls.

10 An example of a call restriction placed on a GSM mobile phone user is one that may apply when the user's subscription belongs to a different network than the network which supports radiocommunication service in the area in which the user's equipment is currently located. For example, the two networks may not have a roaming agreement there between. Such a user may normally be denied access. As a result, the user would be unable to place normal phone calls or use other GSM services, such as the short messaging service (SMS), which require such access. In this instance, only emergency voice calling (i.e., calls to emergency numbers) may be available to the user. Such conventional emergency call handling procedures are set forth in "European Digital Cellular Telecommunications System (Phase 2); Man-Machine Interface (MMI) of the Mobile Station (MS)," GSM 02.30, Version 4.10.0, October 1993; "Digital Cellular Telecommunications Systems (Phase 2); and Mobile Radio Interface Layer 3 Specification," GSM 04.08, Version 4.9.0, July 1994, all of which are hereby expressly incorporated by reference.

25 There may be emergency situations in which a user would like or need to send a character or data message instead of placing an emergency voice call. For example, if a person was having a heart attack and was unable to speak, the transmission of a data message could possibly be the only way in which the person

-3-

could summon emergency assistance. Such an emergency message could include, for example, the user's geographical location. In current GSM-based systems, however, the user would have to place a normal (non-emergency) call in order to send such a data message. When a user is restricted from placing normal calls, emergency data messages could not be sent.

Because GSM-based standards define emergency calls for voice only, only voice messages can be transmitted via a mobile station to an emergency operator. Figure 1 illustrates a conventional emergency calling procedure for a GSM-based system. When a call is initiated from a mobile station, it transmits a CHANNEL REQUEST message to the cellular or satellite network (step 110). The CHANNEL REQUEST message contains an information element called the "Establishment Cause." The Establishment Cause, as the name suggests, provides the network with the type of call being established. Typical values for the Establishment Cause include: Answer to paging, Call re-establishment, Emergency call, Originating data call, Originating speech call, Location updating, and procedures that complete on the Stand Alone Dedicated Control Channel (SDCCH). The SDCCH cause indicates Short Message Service is desired. For emergency calls, the Establishment Cause is set to Emergency Call.

In response to the CHANNEL REQUEST, the network sends an IMMEDIATE ASSIGNMENT message to the mobile station, directing it to a dedicated control channel on which call setup can proceed (step 120) as follows.

After accepting the IMMEDIATE ASSIGNMENT message, the mobile station requests a service from the network by sending a service request message (step 130). In Figure 1, a CM SERVICE REQUEST message is sent. The CM SERVICE REQUEST message contains a CM Service Type information element, which indicates the type of service desired. The CM Service Type can assume one of the following values: MS Originating Call Establishment, Emergency Call Establishment, Short Message Service, and Supplementary Service Activation.

-4-

For an emergency call, the CM Service Type is set to Emergency Call Establishment.

When the ESTABLISHMENT CAUSE indicates that the mobile station requests an emergency call (i.e., the CM Service Type is set to Emergency Call Establishment), only an emergency voice call is permitted. Emergency calls in conventional GSM-based systems are specified only for mobile stations that support telephony. Hence, there is no way for a user to request emergency assistance from an emergency operator other than through voice transmissions.

## 10 SUMMARY

The present invention overcomes the above-identified deficiencies in the art by providing a method for communicating emergency messages using non-voice connections. According to exemplary embodiments of the present invention, an emergency short message service is added to existing digital wireless specifications, such as GSM-based systems. This service allows users to place an emergency call with the specific purpose of sending an emergency data message using Short Message Service (SMS). Such data messages might include the caller's geographical position, electronic mail messages, or possibly, diagnostic information. The emergency data messaging service of the present invention will be given the same access conditions as voice emergency calls in a cellular or satellite system.

## BRIEF DESCRIPTION OF THE DRAWINGS

The above objects and features of the present invention will be more apparent from the following description of the preferred embodiments with reference to the accompanying drawings, wherein:

Figure 1 illustrates a conventional GSM-based emergency calling procedure;

-5-

Figure 2 illustrates an exemplary GSM network into which the principles of the present invention may be implemented; and

Figure 3 illustrates a GSM-based emergency message routing procedure according to the present invention.

## 5 DETAILED DESCRIPTION

The following description is written in terms of cellular or satellite communication systems, but it will be understood that Applicants' invention is not limited to those environments. Also, the following description is written in the context of GSM-based cellular or satellite communication systems, but it will be understood by those skilled in the art that the present invention may apply equally well to other digital communication applications, e.g., those which employ code division multiple access (CDMA).

Figure 2 illustrates an exemplary GSM network in which the principles of the present invention may be implemented. In Figure 2, an originating mobile station (MS-A) 2 sends an MOSM to the mobile switching center (MSC) 4 supporting the geographical area which the mobile station is currently visiting. Not shown explicitly in Figure 2, but as will be apparent to those skilled in the art, is the base station which receives the signal from the mobile station 2 and forwards same to the MSC 4. The MSC 4 forwards the MOSM to interworking mobile switching center (IWMSC) 6 using an address of the service center assigned to mobile station 2 as part of the overhead information associated with the MOSM.

The IWMSC provides centralized interfacing functionality for SMS messaging. For MOSMs, the IWMSC 6 operates to transfer short messages to an identified service center (SC). The IWMSC also functions to transfer results associated with SMS message transmission back to the MSC. In this example, IWMSC 6 forwards the MOSM to SC-A 8. SC-A 8 acknowledges receipt of the

-6-

MOSM back to IWMSC 6, which in turn forwards an acknowledgment back to MSC 4.

Service centers are "store and forward" devices which are logically outside of the mobile radio network. SCs operate to receive and store SMS messages, deliver SMS messages to mobile stations (or receivers outside of the mobile network) and, optionally, customize delivery of SMS messages according to service profiles stored at the SC. In the current example, SC-A 8 receives the MOSM from the IWMSC 6 and, assuming for the sake of this example that the subscriber associated with MS-A has a service profile stored at SC-A 8, performs one or more operations to the MOSM in accordance with the service profile. These operations may include, for example, copying the received SMS message and storing same, sending the SMS message according to a distribution list defined by subscriber A (e.g., routing the SMS message to an emergency messaging center), or converting the SMS message to a desired delivery media (e.g., a fax). After performing whatever operations are indicated by the service profile, SC-A 8 then sends the MOSM as an MTSM to the recipient (which can be a mobile station or any other type of receiving device) identified in the MOSM. This occurs as follows.

The MTSM is first sent to an SMS-gateway mobile switching center (GMSC) 10. Like its counterpart the IWMSC, the GMSC acts as a port into the mobile radio network. Before the GMSC 10 can deliver the SMS message through the chain of nodes to the base station (not shown) which is serving the recipient's mobile station, the GMSC 10 must first determine the location of the recipient's mobile station (i.e., which MSC is currently serving that mobile station). Thus, GMSC 10 first interrogates the recipient's home location register (HLR) 12 to obtain routing information for the message.

HLRs store data relating to subscribers including, for example, current location of the subscribers' equipment, directory number (MSISDN), radio



-7-

number plan identification (e.g., International Mobile Subscriber Identity (IMSI)), supplementary service profiles and teleservice profiles. For MTSMs, HLRs provide (upon request) the identity of the visited MSC associated with a recipient of the SMS message, as well as information relating to whether the mobile station  
5 can receive the message (e.g., whether the subscriber is barred from receiving MTSMs). In the current example, to interrogate the HLR 12, a GSM MAP message called "Send Routing Information for Short Message" is sent by the GMSC 10 to the HLR 12. The appropriate HLR for interrogation can be determined using the recipient's MSISDN, e.g., by translating the MSISDN into a  
10 CCITT No. 7 address.

After receiving the routing information, e.g., the visited MSC number and IMSI, from HLR 12, the GMSC 10 forwards the message to the visited MSC/VLR 14 which is currently serving the recipient's mobile station MS-B 16. Note that for purposes of simplicity the visitor location register (VLR) has been  
15 illustrated in Figure 2 as being integrated with the mobile switching center, although in practice these two nodes can be physically separated. The VLR manages data associated with subscribers which are currently situated within its area of responsibility, e.g., those which have roamed into the service area of that VLR. The VLR is updated with information from a subscriber's home location  
20 register. With respect to handling SMS messages, the VLR also stores an indication if a mobile station is unreachable for delivery of a particular MTSM. The VLR notifies the HLR when a mobile station can later be reached to deliver the MTSM.

The message is thus delivered to the MS-B 16 via a base station (not  
25 shown) over the air interface. Acknowledgment signals are then transmitted back through the chain of nodes.

As indicated above, conventional GSM-based networks fail to provide a method for communicating emergency messages using non-voice connections.

-8-

Typically, one must speak with and give location information to an emergency operator in order to summon help when using a cellular or wireless phone.

Emergency operators currently monitor voice calls only; monitoring of emergency calls of types other than speech is not generally available.

5           The present invention provides a method by which a caller can send special emergency messages to an emergency operator over a cellular or wireless phone. Such messages could include, for example, the caller's geographical position using data from a Global Positioning System (GPS) receiver incorporated into the mobile station, electronic mail, or diagnostic information from other systems  
10       (e.g., medical data) with which the mobile is communicating.

          In order to provide an emergency data messaging procedure, the present invention adds two new parameters to the conventional GSM-based emergency calling procedure. As set forth above, the Establishment Cause typically indicates one of the following causes: Answer to paging, Call re-establishment, Emergency  
15       call, Originating data call, Originating speech call, Location updating, and procedures that complete on the Stand Alone Dedicated Control Channel (SDCCH). The present invention adds a new cause, an Emergency SDCCH Procedure cause, in order to indicate to the network that the mobile station wishes  
20       to establish an emergency procedure that completes on the SDCCH.

          In addition, a new service type is added to the service request message  
20       (i.e., CM SERVICE REQUEST) in order to identify that the service requested by the mobile station is an emergency short message service. As a result, it is possible to establish emergency calls using the Short Message Service, even in those situations in which a mobile station is located in a geographic area in which  
25       communications for lower priority communicating would be prohibited, the user's subscription is limited, or the user has no subscription identification module (SIM) card or a broken SIM card.

Figure 3 illustrates an exemplary emergency data messaging procedure according to the present invention. When a call is initiated from the mobile station, a CHANNEL REQUEST message is sent from the mobile to the network (step 310). When the mobile is requesting the emergency SMS procedure of the present invention, the Establishment Cause, contained in the CHANNEL REQUEST message, indicates that an Emergency SDCCH Procedure is desired.

In response to the CHANNEL REQUEST, the network sends an IMMEDIATE ASSIGNMENT message to the mobile station (step 320). Similar to the conventional emergency calling procedure, the IMMEDIATE ASSIGNMENT message directs the mobile to a dedicated control channel on which call setup can proceed.

After accepting the IMMEDIATE ASSIGNMENT message, the mobile station transmits a CM SERVICE REQUEST message to the network (step 330). According to the present invention, the CM Service Type is specified as "Emergency Short Message Service." As a result, the emergency data message from the mobile station is given priority and routed to, for example, an emergency messaging center. The emergency messaging center could then provide the necessary assistance in a timely manner.

According to the present invention, a caller is given the ability to transmit a special emergency message to an emergency operator. The present invention specifies an extension to digital wireless systems (e.g., GSM-based systems) for incorporation of an emergency short message service. Municipalities could monitor messages transmitted using this service in order to provide the public with improved access to emergency assistance.

The present invention is of particular value to those who have special health problems, the elderly, children who are at home alone, or anyone who desires a high degree of personal security. One skilled in the art will appreciate that possible users of the present invention could include: a person who has

-10-

epilepsy or asthma or heart failure or some condition that would prevent them from talking directly with an emergency operator; a child who is home alone after school who may need the ability to call for help easily in an emergency situation; a person who is being threatened by an attacker and who may not be able to speak  
5 directly with an emergency operator; or a person with an emergency who has a phone that is equipped with a GPS receiver and who is located in the wilderness.

Many variants and combinations of the techniques taught above may be devised by a person skilled in the art without departing from the spirit or scope of the invention as described by the following claims.

-11-

**WHAT IS CLAIMED IS:**

1. A method for routing emergency messages from a mobile station in radiocommunication network, said method comprising the steps of:  
    sending a channel request from said mobile station indicating an  
5 emergency Stand-alone Dedicated Control Channel (SDCCH) procedure;  
    receiving an assignment message at said mobile station in response to said channel request, said assignment message directing said mobile station to a dedicated logical channel; and  
    sending, in response to the assignment message, a CM service  
10 request indicating an emergency short message service (SMS);  
    wherein said mobile station transmits at least one emergency message using SMS.
2. The method of claim 1 wherein said mobile station is a wireless phone.
- 15 3. The method of claim 1 wherein said at least one emergency message indicates a location of said mobile station.
4. The method of claim 1 wherein said at least one emergency message indicates medical diagnostic information.
5. The method of claim 1 wherein said dedicated control channel is  
20 used for call setup.
6. A system for routing emergency messages from a mobile station in a radiocommunication network, said system comprising:

-12-

means for sending a channel request from said mobile station indicating an emergency Stand-alone Dedicated Control Channel (SDCCH) procedure;

5 means for receiving an assignment message at said mobile station in response to said channel request, said assignment message directing said mobile station to a dedicated logical channel; and

means for sending, in response to the assignment message, a CM service request indicating an emergency short message service (SMS);

10 wherein said mobile station transmits at least one emergency message using SMS.

7. The system of claim 6 wherein said mobile station is a wireless phone.

8. The system of claim 6 wherein said at least one emergency message indicates a location of said mobile station.

15 9. The system of claim 6 wherein said at least one emergency message indicates medical diagnostic information.

10. The system of claim 6 wherein said dedicated control channel is used for call setup.

20 11. A method for requesting emergency assistance by a user of a mobile station in a radiocommunication network, said method comprising the steps of: requesting, by said mobile station, an emergency short message service (SMS); and

-13-

sending, by said mobile station, at least one emergency data message to an emergency operator using SMS;

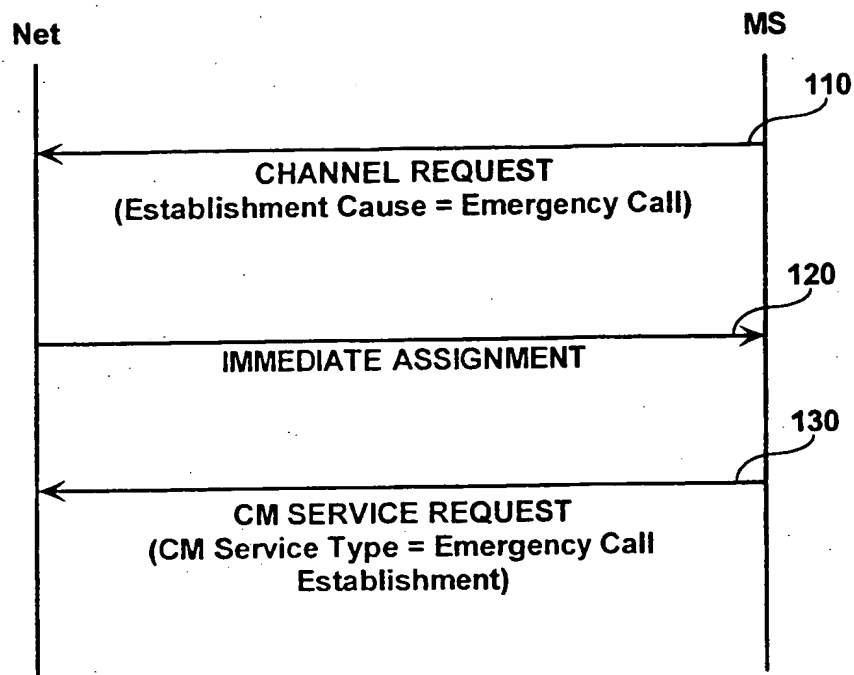
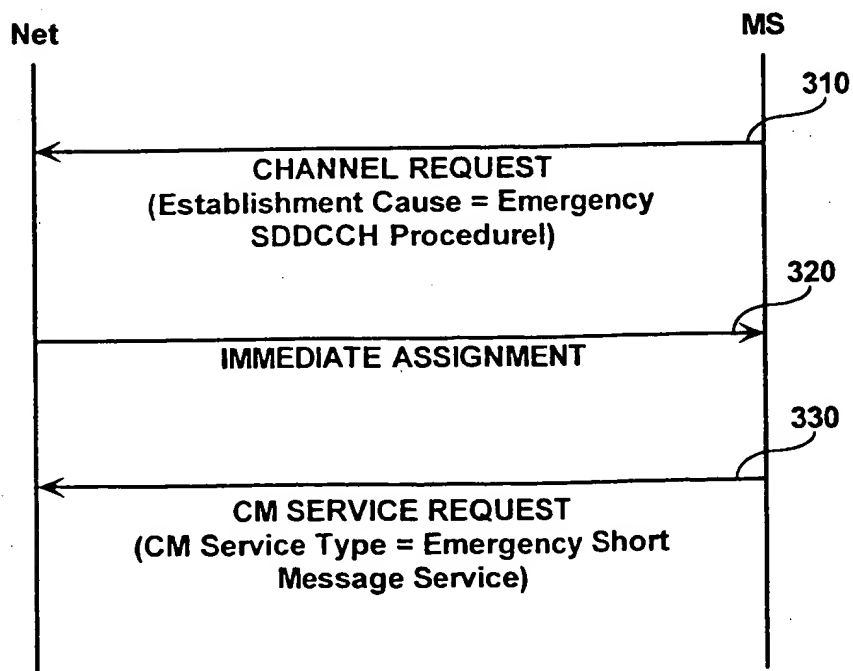
wherein said at least one emergency data message is given a same access condition to said radiocommunication network as a voice emergency call.

5           12.    The method of claim 11 wherein said mobile station is a wireless phone.

13.    The method of claim 11 wherein said at least one emergency data message indicates a geographical position of said mobile station.

10       14.    The method of claim 11 wherein said at least one emergency data message indicates medical diagnostic information.

15.    The method of claim 11 further comprising the step of:  
sending a channel request from said mobile station indicating an emergency Stand-alone Dedicated Control Channel (SDCCH) procedure.

**FIGURE 1****FIGURE 3**



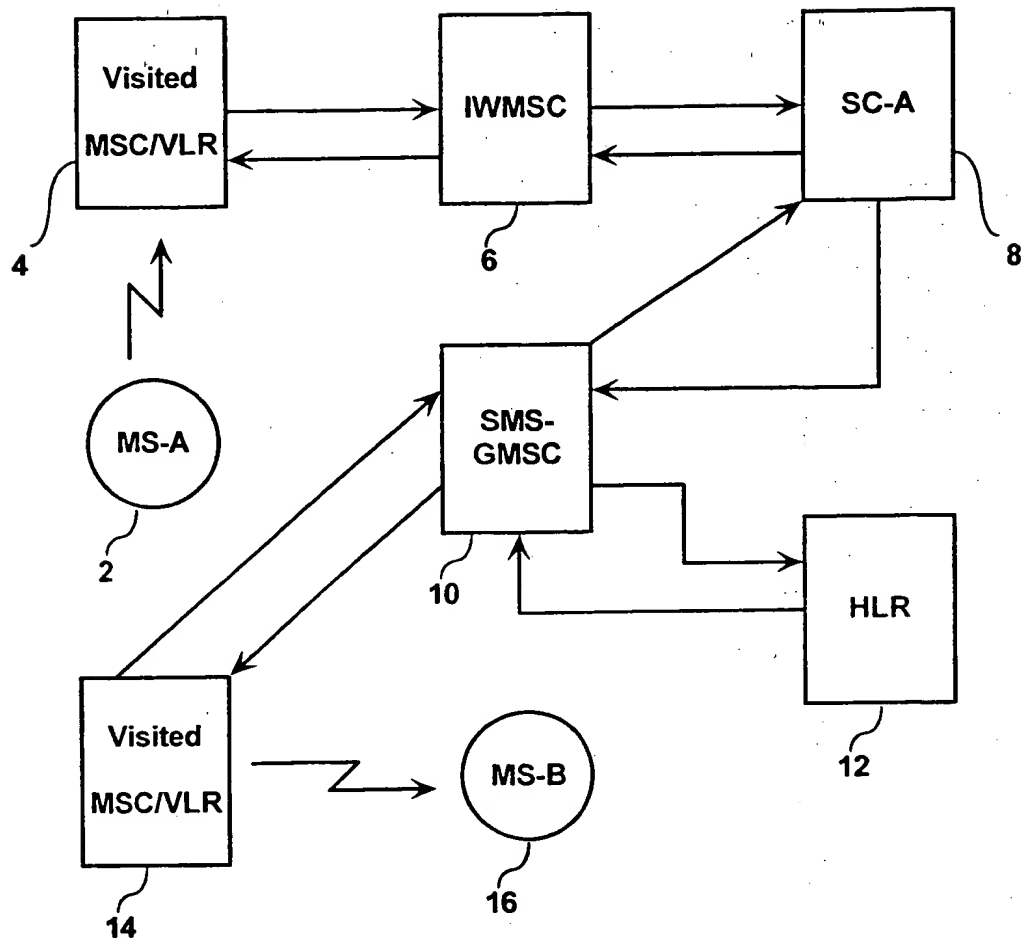


FIGURE 2

## INTERNATIONAL SEARCH REPORT

International Application No

PL./US 99/16687

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 97 21314 A (ERICSSON TELEFON AB L M) 12 June 1997 (1997-06-12) page 3, line 5 - line 12 page 4, line 19 - line 25 -----	1-15



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 November 1999

Date of mailing of the international search report

01/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

RothlÜbbers, C

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PL /US 99/16687

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9721314 A	12-06-1997	AU 1044197 A US 5937355 A	27-06-1997 10-08-1999

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**